


# APDatec 14

Flexible hose made of soft PVC, reinforced with an shock

- Applications** agriculture, water drain, irrigation, sewage treatment plants, pump technology
- Structure** PVC / soft PVC, green, opaque, plastic spiral / hard PVC
- Temperature** -5°C up to 60°C
- Properties** good flexibility, high pressure resistance, high vacuum resistance, corrugated outside, very smooth inside, good chemical resistance, good ozone- & UV-resistance, hydrolysis- & microbe resistance, weather proof

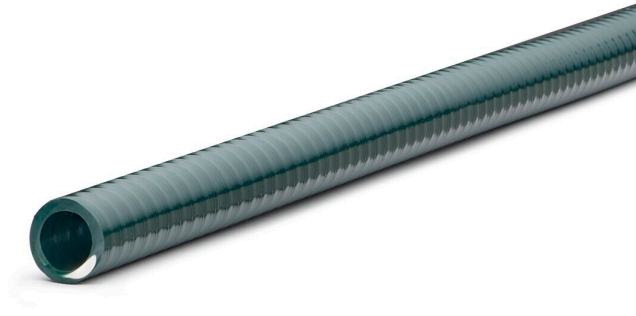

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Betriebsdruck Max. (bar)	Vakuum Max. (bar)	Weight (kg/m)	Length	Article Number
25	33	4,20	140	7,00	0,78	0,48	50	140250500
38	47	4,50	180	7,00	0,78	0,71	50	140380500
50	59	4,70	220	7,00	0,78	1,08	50	140500500
75	87	5,80	300	5,00	0,78	1,80	50	140750500